


[位置図]



[全景写真]

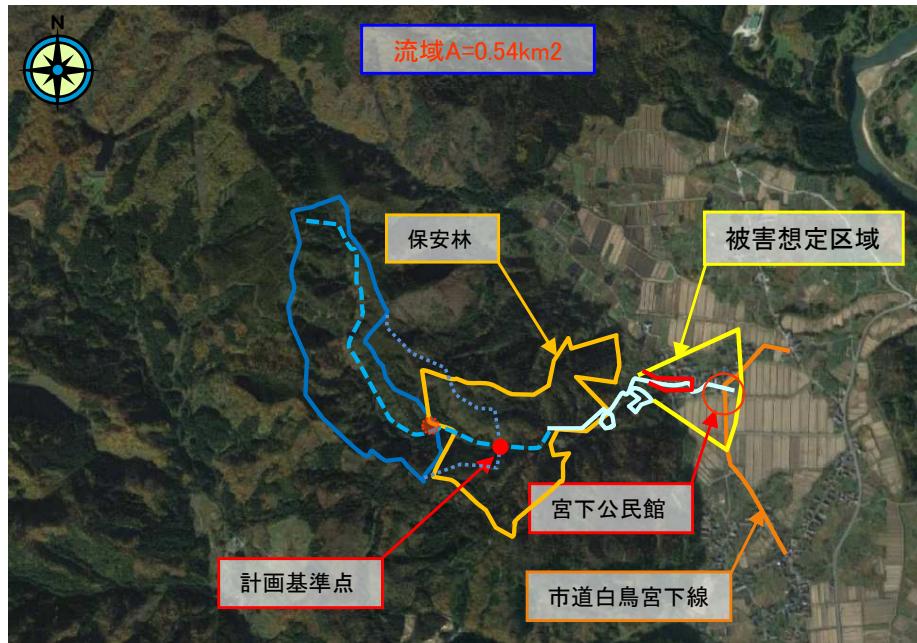

保全対象施設


人家(宮下地区)




宮下公民館、市道



[平面図]

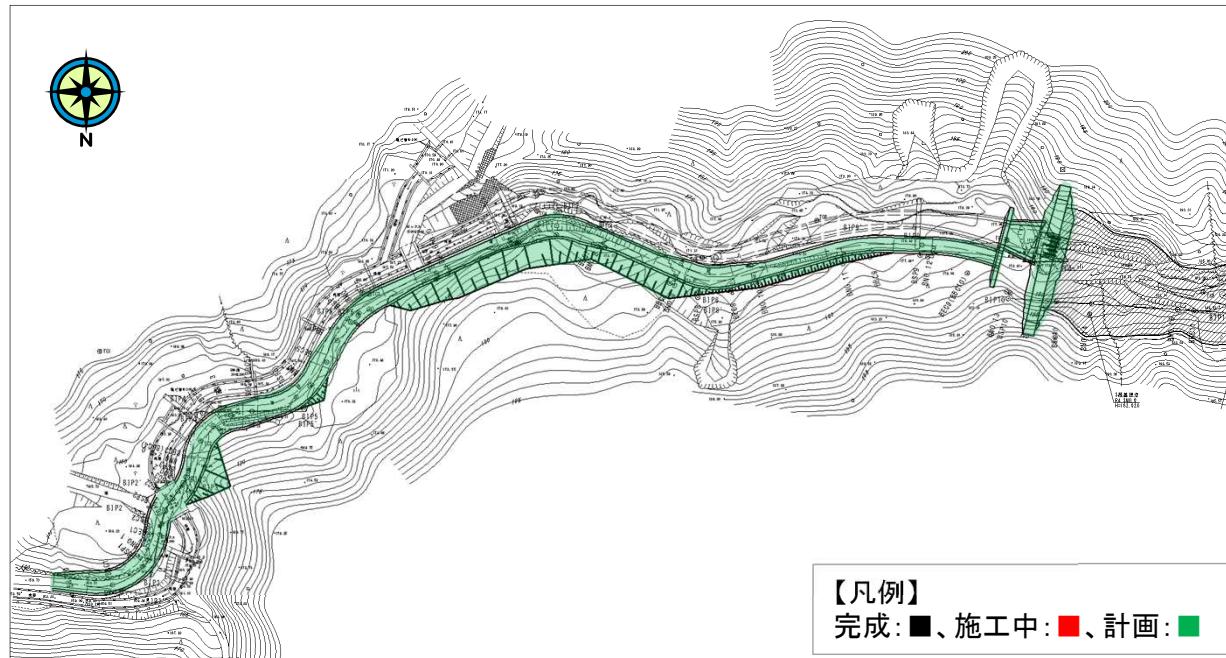

[砂防えん堤正面図]

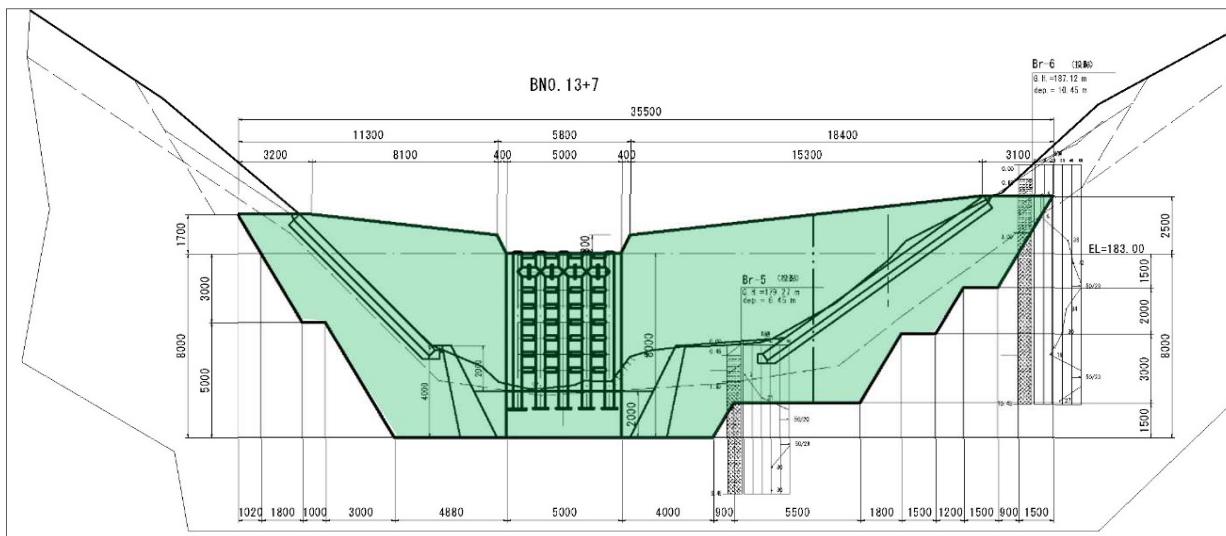

[荒廃状況]



[整備率]

$$\text{整備率(%)} = \frac{\text{施設効果量}}{\text{流出するおそれのある土砂量}}$$

- 流出するおそれのある土砂量: $4,438 \text{ m}^3$
- 施設効果量 (砂防えん堤工): $4,583 \text{ m}^3$

▶ 整備前 0(%)
現況 0(%) = $0 \text{ m}^3 / 4,583 \text{ m}^3$
整備後 103(%) = $4,583 \text{ m}^3 / 4,438 \text{ m}^3$